

FIELD-PROVEN COTS, MOTS AND CUSTOM MILITARY POWER SOLUTIONS

M1982 SERIES

AC/DC POWER SUPPLY



PRODUCT HIGHLIGHTS

- HIGH DENSITY
- HIGH POWER FACTOR
- SINGLE OUTPUT
- AC/DC POWER SUPPLY
- UP TO 300 W
- OPTIONAL 10J HOLDUP







Cham, Switzerland www.enercon-europe.com enercon@enercon-europe.com +41 41 740 4554 **Global Headquarters**

Netanya, Israel www.enercon.co.il sales@enercon.co.il +972-73-246 9200



Gurgaon, India www.mpsindia.in sales@mpsindia.in +91-124-651 0010

Applications

Military (Airborne, ground-fix, shipboard), Ruggedized, Telecom, Industrial

Special Features

- Miniature size
- High efficiency
- Wide input range
- High power factor (0.99)
- Input / Output isolation
- Inrush Current Limiter
- External Inhibit (On/Off)
- Fixed switching freq. (250 kHz)
- Externally synchronizable
- EMI filters included
- Remote sense compensation
- Indefinite short circuit protection with auto-recovery
- Over-voltage shutdown with auto-recovery
- Over temperature shutdown with auto-recovery

Electrical Specifications

AC Input

85 to $265\,V_{AC}$, $50/60/400\,Hz$ single-phase IAW MIL-STD-704A † (115 $\,V_{rms}$ / $400\,Hz$)

& MIL-STD-1399-300B Type I

 $(115 V_{rms} / 60 Hz)$

DC Output

Voltage range: 3.3 to 48 V_{DC} Current range: 0 to 20 A Power range: 0 to 300 W

Isolation

Input to Output: $1000\,V_{DC}$ Input to Case: $1000\,V_{DC}$ Output to Case: $200\,V_{DC}$

Line/Load regulation

Less than 1% (no load to full load, -40 °C to +85 °C)

Ripple and Noise

100 – 150 mV_{p-p}, typical (max 1%) without external capacitance.

Efficiency

86% Typical (115 V_{rms} input) 88% Typical (230 V_{rms} input) (Both at 28 V_{DC} output, full load, room temperature)

Load Transient Response

For $28\,V_{DC}$ output, current change from 50%-100% results in less than 0.5V change and settling within $200-300\,\mu s$

<u>EMC</u>

Designed to meet MIL-STD-461F: CE101, CE102, CS101, CS114 CS115, CS116, RE101, RE102 RS101, RS103

Turn on Transient

No output voltage overshoot during power on.

[†] Standard models do not maintain output regulated during transfer operation and/or during normal under-voltage transients. If such features are required, please consult factory.

^{\$\}frac{1}{2}\$ Standard models do not maintain output regulated during automatic bus transfer operation. If such a feature is required, please consult factory.

^{*}Compliance achieved with shielded harness and static resistive load.

Protections *

<u>Input</u>

- Inrush Current Limiter
 Peak value of up to 5 times
 maximum input current for
 less than 50 µs.
- Under Voltage Lock-Out Unit protects itself (no damage) below 75 V_{AC} and turn off.

Output

- Active Over Voltage Protection 10% ± 2% above nominal voltage.
- Passive Over Voltage Protection
 Transorb at output selected 20%
 ± 5% above nominal voltage.
- Over Load / Short Circuit 10 30% above maximum current, indefinitely (Hiccup).

General

• Over Temperature Protection Shutdown at base plate temp. above +105°C ± 5°C Automatic recovery at base plate temp. below +95°C ±5°C

Environmental Conditions

Designed to Meet MIL-STD-810F

Temperature

Methods 501.4 & 502.4

Operating: -40°C to +85°C (at baseplate)

Storage: -55°C to +125°C (ambient)

<u>Altitude</u>

Method 500.4

Procedures I – Storage/Air transport: up to 70,000 ft. (non-operational)

Procedure II – Operation/Air Carriage:

up to 40,000 ft. (operational)

Humidity
Method 507.4
Up to 95%

кH

Vibration

Method 514.5

Procedure I, Category 24

General minimum integrity exposure

IAW Figure 514.5C-17

1 hour per axis.

Shock

Method 516.5

Procedure I

20 g / 11 ms terminal peak sawtooth shock pulse

Salt Fog

Method 509.4

Reliability

150,000 hours, calculated IAW MIL-HDBK-217F Notice 2 at +85°C baseplate, Ground fixed conditions.

Environmental Stress Screening (ESS)

100% of delivered power supplies are tested at low ambient temperature, high baseplate temperature and at standard room temperature.

Additional tests, such as random vibration and thermal cycling can be added. Consult factory for details.

^{*} Thresholds and protections can be modified / removed – please consult factory

Pin Assignment

J1 - Input connector

Type: M24308/24-37F or eq. **Mates with:** M24308/2-1F or eq.


Pin No.	Function	
1	NEUTR AL	•
2	N/C	
3	PHASE	•
4	N/C	
5	CHASSI S	0
6	NEUTR AL	•
7	N/C	
8	PHASE	•
9	N/C	


J2 - Output connector


Type: M24308/23-38F or eq. **Mates with:** M24308/4-2F or eq.

	-	
Pin No.	Function	
1	SYNC	0
2	INHIBIT	•
3	SENSE RTN	0
4	OUTPUT RTN	•
5	OUTPUT RTN	•
6	OUTPUT	•
7	OUTPUT	•
8	SENSE	•
9	SIGNAL RTN	•

Pin No.	Function	
10	OUTPUT RTN	•
11	OUTPUT RTN	•
12	OUTPUT RTN	•
13	OUTPUT	•
14	OUTPUT	•
15	OUTPUT	•







Date: November 18, 2020 Rev (G) Page **4** of **6**

Functions and Signals

SENSE

The SENSE line is used to achieve accurate voltage regulation at load terminals. To use this feature, connect this pin directly to load's positive terminal.

If this function is not required, short SENSE pin to OUTPUT pins as close as possible to the unit.

SENSE RTN

The SENSE RTN line is used to achieve accurate voltage regulation at load terminals. To use this feature, connect this pin directly to load's negative terminal.

If this function is not required, short SENSE RTN pin to OUTPUT RTN pins as close as possible to the unit.

<u>Note</u>: The use of remote sense has a limit of voltage dropout between the converter's output and the load's terminals of approximately 5% of nominal output voltage.

INHIBIT

The INHIBIT signal is used to turn the power supply ON and OFF. TTL "1" or OPEN – Power supply active (output turned on). TTL "0" or SHORT to Signal RTN – Power supply inhibited (output turned off). If this function is not required, leave this pin unconnected.

SYNC

The SYNC signal is used to synchronize the power supply's switching frequency to system's clock. Valid external clock frequency is $250 \text{kHz} \pm 10 \text{kHz}$. If this function is not required, leave this pin unconnected - the power supply will use its internal clock.


SIGNAL RTN

Both INHIBIT and SYNC signals are referenced to this pin. This pin is floating from both input and output.

CHASSIS


The CHASSIS pin allows additional connection of unit's chassis to system ground.

Typical Connection Diagram

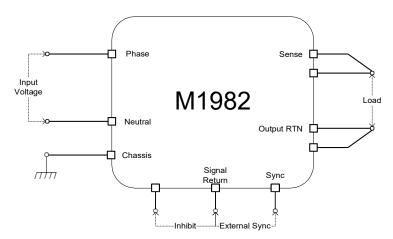


Date: November 18, 2020 Rev (G) Page 5 of 6

Outline Drawing

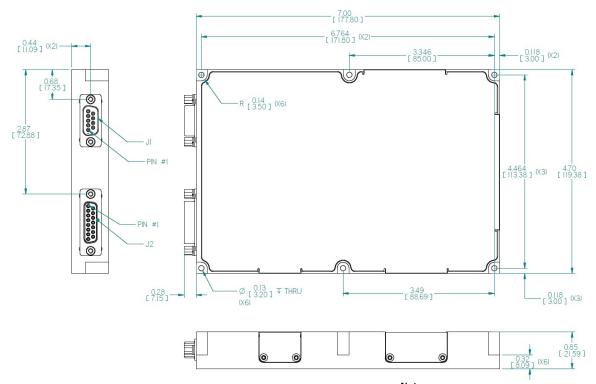

Heat Dissipation Surface

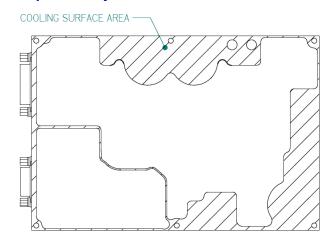

<u>Notes</u>

- 1. Dimensions are in inches [mm]
- 2. Tolerance is: $.XX \pm 0.03 \text{ in} \\ .XXX \pm 0.010 \text{ in}$
- 3. Weight: Approx. 27.16 oz [770 g]

Dissipation Area 9.1 in² [5871 mm²]

Note: Specifications are subject to change without prior notice by the manufacturer.

Date: November 18, 2020 Rev (G) Page 6 of 6