



MILTECH™ 610PoE

Military-grade Fast Ethernet PoE Switch

PRODUCT DESCRIPTION

The MILTECH™ 610PoE is a military-grade Power over Ethernet (PoE) switch that supports 30W of PoE on all 8 Fast Ethernet 10/100 Ports - giving a total PoE power budget of 240 watts to power both 802.3af and 802.3at standard devices.

MILTECH™ 610PoE is ideal for mobile Ethernet-equipped platforms, such as vehetronic, ground vehicles and aerial applications where traditional power sources have limited availability and supports COTS guidelines for PoE-enabled cameras, WiFi access points, mesh nodes and other devices.

Developed for military and harsh environment applications, the MILTECH™ 610PoE features mechanical packaging enhancements designed for MIL-STD-810F airborne and ground environmental compliance and high reliability. The unit has been especially hardened to improve ingress, impact, and shock/vibration protection, as well as eliminate all moving parts through passive cooling, and interface through sealed MIL-D-38999 circular connectors.

SPECIFICATIONS

ETHERNET PORTS:	<ul style="list-style-type: none"> 8 x 10/100TX PoE+ ports
NETWORKING:	<ul style="list-style-type: none"> Full wire-speed forwarding rate Store-and-forward mechanism Auto MDI-II, MDI-X Auto-Negotiation Protocol Address Look-Up
CONNECTORS:	<ul style="list-style-type: none"> Power Connector: D38999/24WA98PA LAN Connector: D38999/24WA355N Indication Per Port (Link/Activity, Speed, PoE)
CHASSIS:	<ul style="list-style-type: none"> Low profile rugged aluminum Conductively cooled w/custom internal heat-sinks Ingress protection against sand, dust and moisture Anodize Coating, MIL-A-8625, Type II, Class 2
STANDARDS:	<ul style="list-style-type: none"> MILSTD-1275 MILSTD-704A MILSTD-461E MILSTD-810F GM IP67
PERFORMANCE:	<ul style="list-style-type: none"> 128K Byte of SRAM for Frame Buffering 2.0Gbps High-Performance Memory Bandwidth 2LED indication (Speed, Link/Activity) per port Wire-Speed Reception and Transmission Integrated Address Look-Up Engine Automatic Address Learning







MILTECH™ 610PoE

Military-grade Fast Ethernet PoE Switch

SPECIFICATIONS

STANDARDS COMPLIANCE:	<ul style="list-style-type: none"> IEEE 802.3 10 Mbps 10BASE-T (Ethernet) IEEE 802.3u 100BASE-TX 100 Mbps (Fast Ethernet) IEEE 802.3x Flow Control IEEE 802.3af, IEEE 802.3at
POWER:	<ul style="list-style-type: none"> MIL-STD-1275B & MIL-STD 704A Surge and Spike protection Voltage Input: 24Vdc Nominal (18-32V) Power Consumption: 6W Typical Chassis grounding
PoE:	<ul style="list-style-type: none"> Total PoE Budget 240W Maximum Consumption per port 30W Dynamic Power Allocation PoE Priority per port Full Comply to IEEE 802.3af, IEEE 802.3at No Power Degradation at +85°C Operates from Regular Military 24Vdc No need for additional PoE 48Vdc Input Optional GUI/Web Application for PoE Management
ELECTROMAGNETIC:	<ul style="list-style-type: none"> MIL-STD-461E Electromagnetic compatibility CE-102 CS-114 CS-115 CS-116 RE-102 R5-103
SHOCK/VIBRATION/HUMIDITY:	<ul style="list-style-type: none"> MILSTD-810F/G/GM: Random vibration (514.5I) Bench Handling (516.6VI) High Temp.(501.5I,II) Low Temp.(502.5I) Humidity (507.5II) Air Pressure (500.5I,II) Blowing Rain (506.5I) Immersion (512.5I) Salt Atmosphere (509.5I) Blowing Dust (510.5I) Loose Cargo Vibration (514.6II) Wind Analysis. IP67
PHYSICAL:	<ul style="list-style-type: none"> Dimensions: 269mm (L) x 133mm(W) x 71.7mm(H), including connectors Dimensions: 10.6”(L) x 5.2”(W) x 2.8”(H), including connectors Weight: 1.5kg
INSTALLATION:	<ul style="list-style-type: none"> Four 4x5.2 mounting holes on bottom for mounting to any flat surface Carrying handles - Optional
COOLING:	<ul style="list-style-type: none"> No Moving Parts. Passive Cooling
OPERATING TEMP:	<ul style="list-style-type: none"> -45 C to +85 C (-49 F to +185 F) – Cold Start-Up
STORAGE TEMP:	<ul style="list-style-type: none"> -45°C to +85°C (-49°F to +185°F)

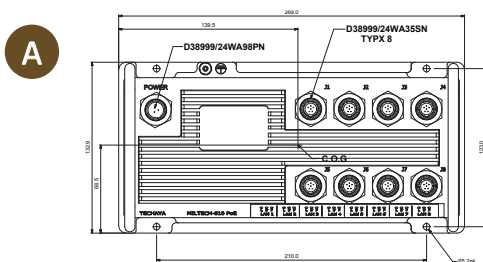

*All measurements are in millimeters



MILTECH™ 610PoE

Military-grade Fast Ethernet PoE Switch

ORDERING INFORMATION

PART NUMBER	DESCRIPTION
1-610PoE-001	<ul style="list-style-type: none">MILTECH610, military Rugged, 8 x PoE+ 10/100TX, Switch
2-CBL610PW3M	<ul style="list-style-type: none">Power cable MILTECH610, MIL-D-38999 Connectors, 3 meter length
2-CBL708LN3M	<ul style="list-style-type: none">LAN Cable for MILTECH610, MIL-D-38999 to RJ-45 Connectors, 3 meter length
800-H-0610-000	<ul style="list-style-type: none">CARRYING HANDLES KIT FOR MILTECH610