



# MILTECH™ 904

## Compact, Portable Military Managed Gigabit Ethernet Switch

Driven by rapid advancement and lower costs, Ethernet is becoming the standard for IP-based components in a wide range of military and commercial applications, including:

- UAVs
- Land autonomous vehicles (UGVs)
- Robots
- Mobile equipment fielded in harsh environments

Modern platforms contain dozens of network devices that must be interconnected. The MILTECH 904 is an ideal solution for mobile Ethernet-equipped platforms. With the best combination of size, weight, power and cost (SWaP-C) in the industry, it saves valuable real estate for computers, sensors, targeting systems, and other devices that make mobile platforms highly effective.

The 904 is a MIL-STD, fully managed military grade network switch offering 4 triple-speed (10/100/1000Mbps) ports.

MILTECH 904 can be remotely managed to optimize communications and prioritize critical information traffic. Advanced network features, never before found in a package of this size, include switching protocols, virtual LANS (VLANS), traffic prioritization (QoS), and bandwidth aggregation are standard.

The MILTECH904's gigabit speeds and 24VDC power make it instantly compatible with any network device and power systems.

Its mechanical packaging enhancements, including ruggedized SCE2 circular connectors, is designed for MIL-STD-810F airborne and ground environmental compliance and high reliability. Leveraging best-in-class switching technology, the MILTECH 904 serves as a robust commercial off-the-shelf (COTS) solution for rugged LAN connectivity.









## SPECIFICATIONS

ETHERNET PORTS:	<ul style="list-style-type: none"> <li>4 x 10/100/1000BaseT managed ports</li> </ul>
NETWORKING:	<ul style="list-style-type: none"> <li>Spanning Tree (802.1d), RSTP (802.1w) and MSTP(802.1S) for fast recovery rings</li> <li>Security via Radius Authentication 802.1x, Port Security, Port Mirroring</li> <li>Multicasting (IGMP Snooping), GARP, GMRP, and GVRP Broadcasting and flooding Control up to 8K Groups.</li> <li>802.1q Tagged based VLAN up to 4K VLAN groups.</li> <li>QoS Multi-Layer Classifier, 802.1p, ToS/DSCP traffic classification. WFQ, Strict Queuing.</li> <li>Bridge support for Q-in-Q.</li> <li>Link Aggregation 802.3AD.</li> <li>L3 static routing</li> <li>WEB, CLI, Telnet Management</li> <li>Rmirror*</li> <li>Port Protection: 1+1 port protection, 1:1 port protection, 1:N port protection*</li> <li>G.8032 ring protection*</li> <li>DHCP option 82 relay*</li> <li>L2CP tunneling</li> <li>Protocol-based VLAN*</li> <li>1588v2 PTP with two-step clock*</li> </ul> <p>*Available in part number 1-904-101</p>
CONNECTORS:	<ul style="list-style-type: none"> <li>Power Connector Type: SCE2-B-76A06-07SN</li> <li>LAN Connector Type: SCE2-B-76A07-14SN</li> <li>Management RS-232 Type via Port #1</li> <li>LED Indication Per Port (Link/Activity)</li> </ul>
CHASSIS:	<ul style="list-style-type: none"> <li>Machined rugged aluminum</li> <li>Conductively cooled w/custom internal heat-sinks</li> <li>Ingress protection against sand, dust and moisture</li> </ul>
PERFORMANCE:	<ul style="list-style-type: none"> <li>26.8 Mpps wire speed forwarding rate</li> <li>20 Gbps maximum forwarding bandwidth</li> <li>8K MAC Address</li> </ul>
STANDARDS COMPLIANCE:	<ul style="list-style-type: none"> <li>IEEE 802.1x MAC based Authentication</li> <li>IEEE 802.1Q Vlan Tagging</li> <li>IEEE 802.1P QoS</li> <li>IEEE 802.1S Multiple STP</li> <li>IEEE 802.1W Rapid STP</li> <li>IEEE 802.1AD Link Aggregation</li> <li>IEEE 802.1X</li> </ul>
POWER:	<ul style="list-style-type: none"> <li>Design to meet MIL-STD-1275. Contact us for available reports.</li> <li>Design to meet MIL-STD-704 (no damage, surge and spikes protection)</li> <li>Voltage Input: 24Vdc Nominal (16-36V)</li> <li>Power Consumption: 5W Max</li> <li>Chassis grounding</li> </ul>



## SPECIFICATIONS

ELECTROMAGNETIC:	<ul style="list-style-type: none"><li>• Design to meet MIL-STD-461. Contact us for available reports</li></ul>
ENVIRONMENTAL:	<ul style="list-style-type: none"><li>• MIL-STD-810F. Contact us for available reports.</li><li>• IP68. By similarity</li></ul>
PHYSICAL:	<ul style="list-style-type: none"><li>• Dimensions: 102mm (L) x 73.3mm (W) x 36mm (H), including connectors</li><li>• Dimensions: 4.72"(L) x 2.88"(W) x 1.42"(H), including connectors</li><li>• Weight: 370g</li></ul>
INSTALLATION:	<ul style="list-style-type: none"><li>• Four 4.3mm holes for mounting to any flat surface</li></ul>
COOLING:	<ul style="list-style-type: none"><li>• No Moving Parts. Passive Cooling</li></ul>
OPERATING TEMP:	<ul style="list-style-type: none"><li>• -40°C to +85°C (-40°F to +185 F) - Cold Start-Up</li></ul>
STORAGE TEMP:	<ul style="list-style-type: none"><li>• -40°C to +85°C (-40°F to +185°F)</li></ul>

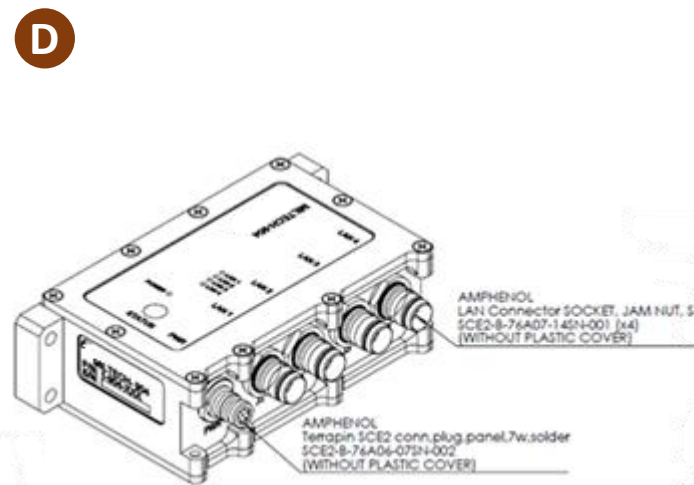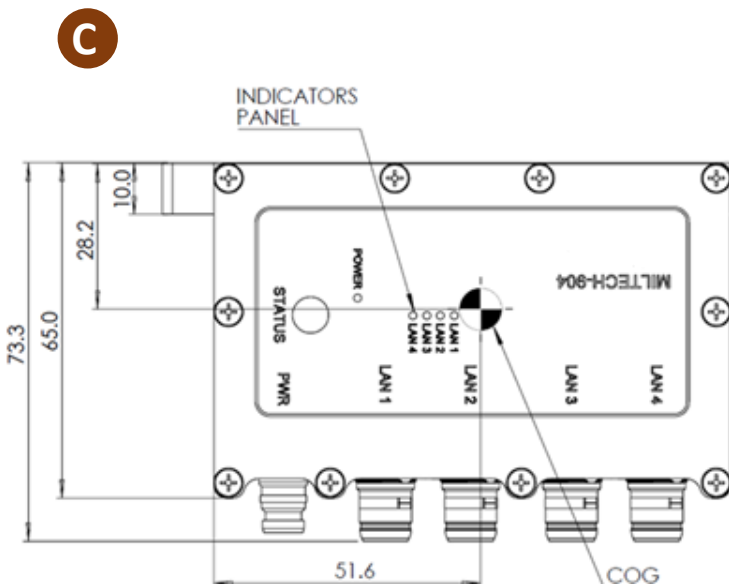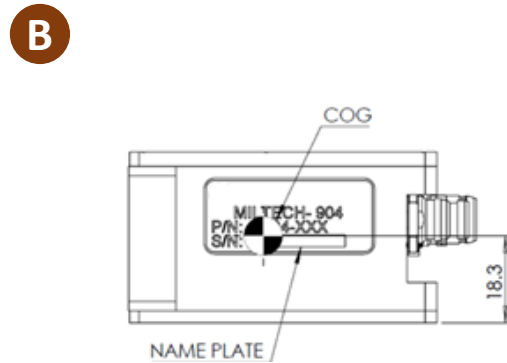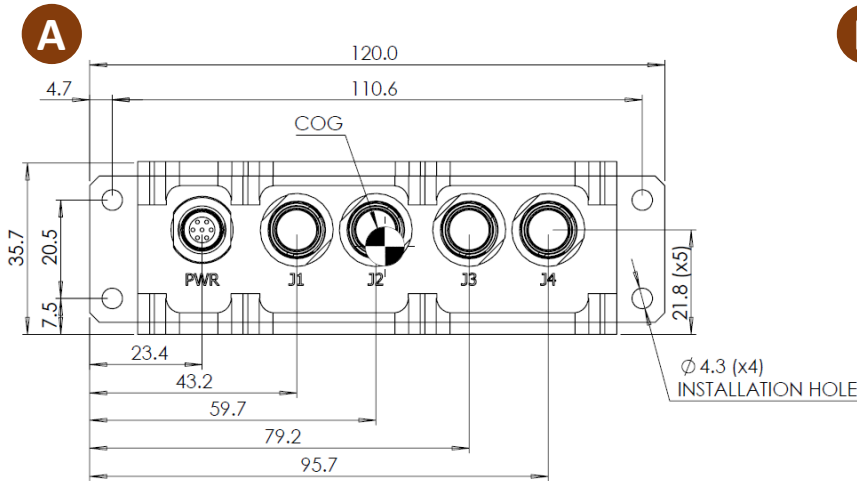

## ORDERING INFORMATION

PART NUMBER	DESCRIPTION
1-904-001	Managed Military Grade Gigabit Ethernet Switch, 4 x 10/100/1000TX
1-904-101	Enhanced Managed Military Grade Gigabit Ethernet Switch, 4 x 10/100/1000TX
2-CBL918PWR3M	Power cable for MILTECH904, MIL-SCE2, 3-meter length
2-CBL9028LAN	LAN cable for Miltech904, MIL-SCE2 To RJ45 connector, 3-meters length
2-CBL9028LN+	LAN & management cable for MILTECH904, MIL-SCE2 To RJ45 & DB9 connector, 3-meters length